


U.S. 422 CORRIDOR IMPROVEMENTS PROGRAM

U.S. 422 Project Under Construction:

U.S. 422 Norfolk Southern to Park Road (U.S. 422, Section M1B)

- Low Bid Price: \$83.65 million
- Funding: 80% Federal, 20% State
- Notice to Proceed Date: November 13, 2023
- Estimated Completion Date: January 9, 2028
- Contractor: J.D. Eckman, Inc.

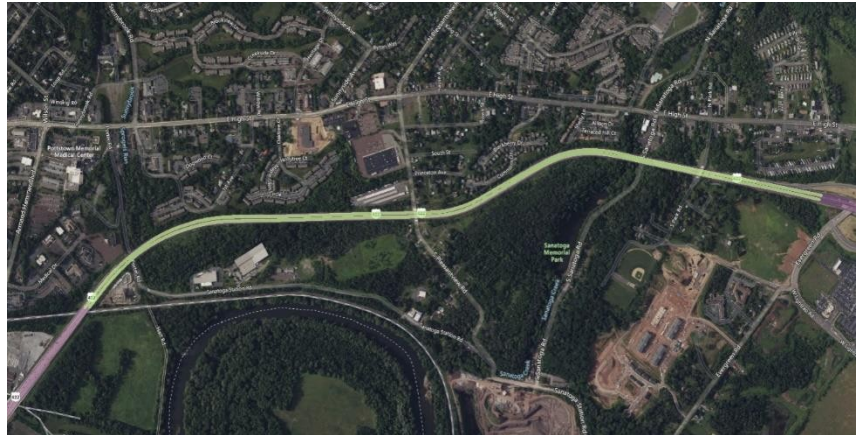

This project will reconstruct approximately 1.7 miles of U.S. 422 including two bridges carrying U.S. 422 over Porter Road, and Sanatoga Road and Sanatoga Creek.

U.S. 422 will be reconstructed on both existing and revised alignments to improve horizontal curve radii, shoulder widths, and vertical clearance. The acceleration lane for the westbound on-ramp from the Sanatoga Interchange will also be lengthened.

A culvert at Sprogels Run, located just east of Porter Road, will be removed and a new two-span structure will be built over Porter Road and Sprogels Run. The project includes noise mitigation in the form of sound barrier walls. Intelligent Transportation System is also being deployed on the U.S. 422 corridor and on arterial roadways near the corridor.