
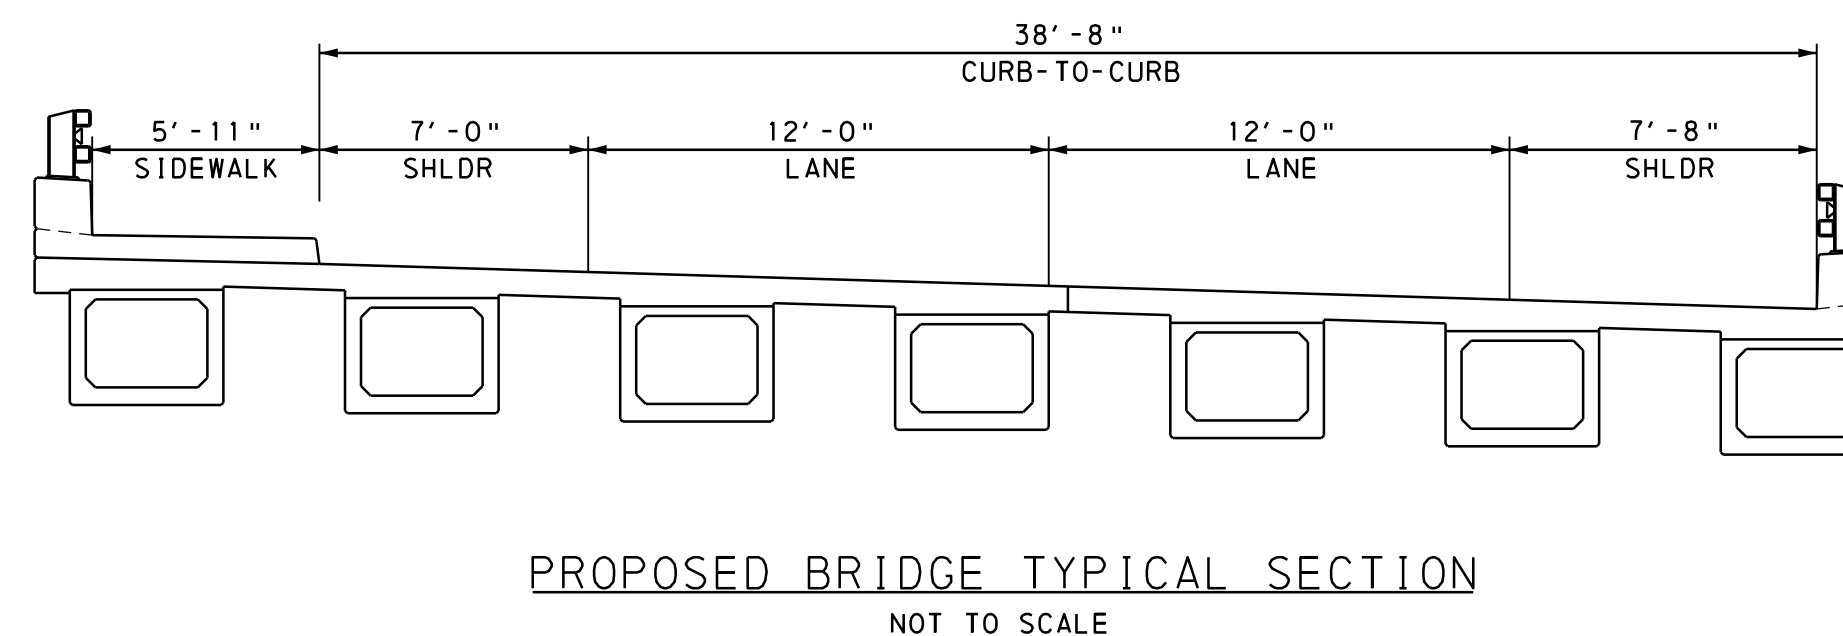
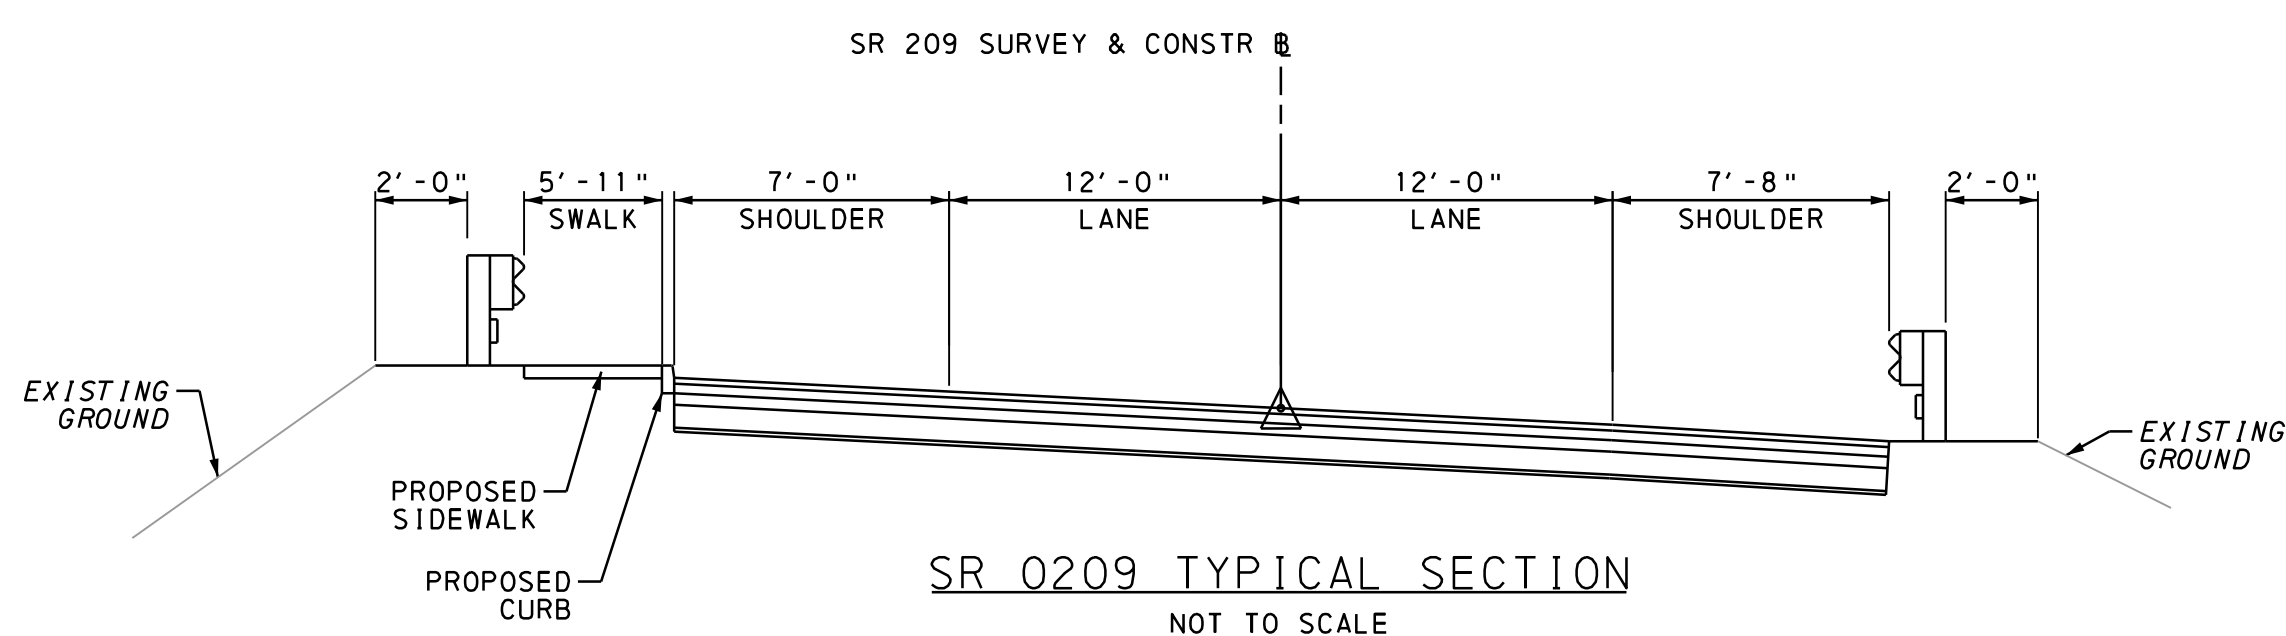


PROJECT OVERVIEW

- Replacement of an existing bridge superstructure with new spread box beam bridge carrying SR 0209 over Wiconisco Creek
- Pavement reconstruction at bridge approaches matching existing 12' lanes, 7' shoulder and 5'-11" sidewalk widths
- Bridge to be constructed in 2 stages with half-width construction. One lane of traffic will be maintained utilizing temporary traffic signals.
- Pedestrian access will remain open during construction

PROPOSED PROJECT

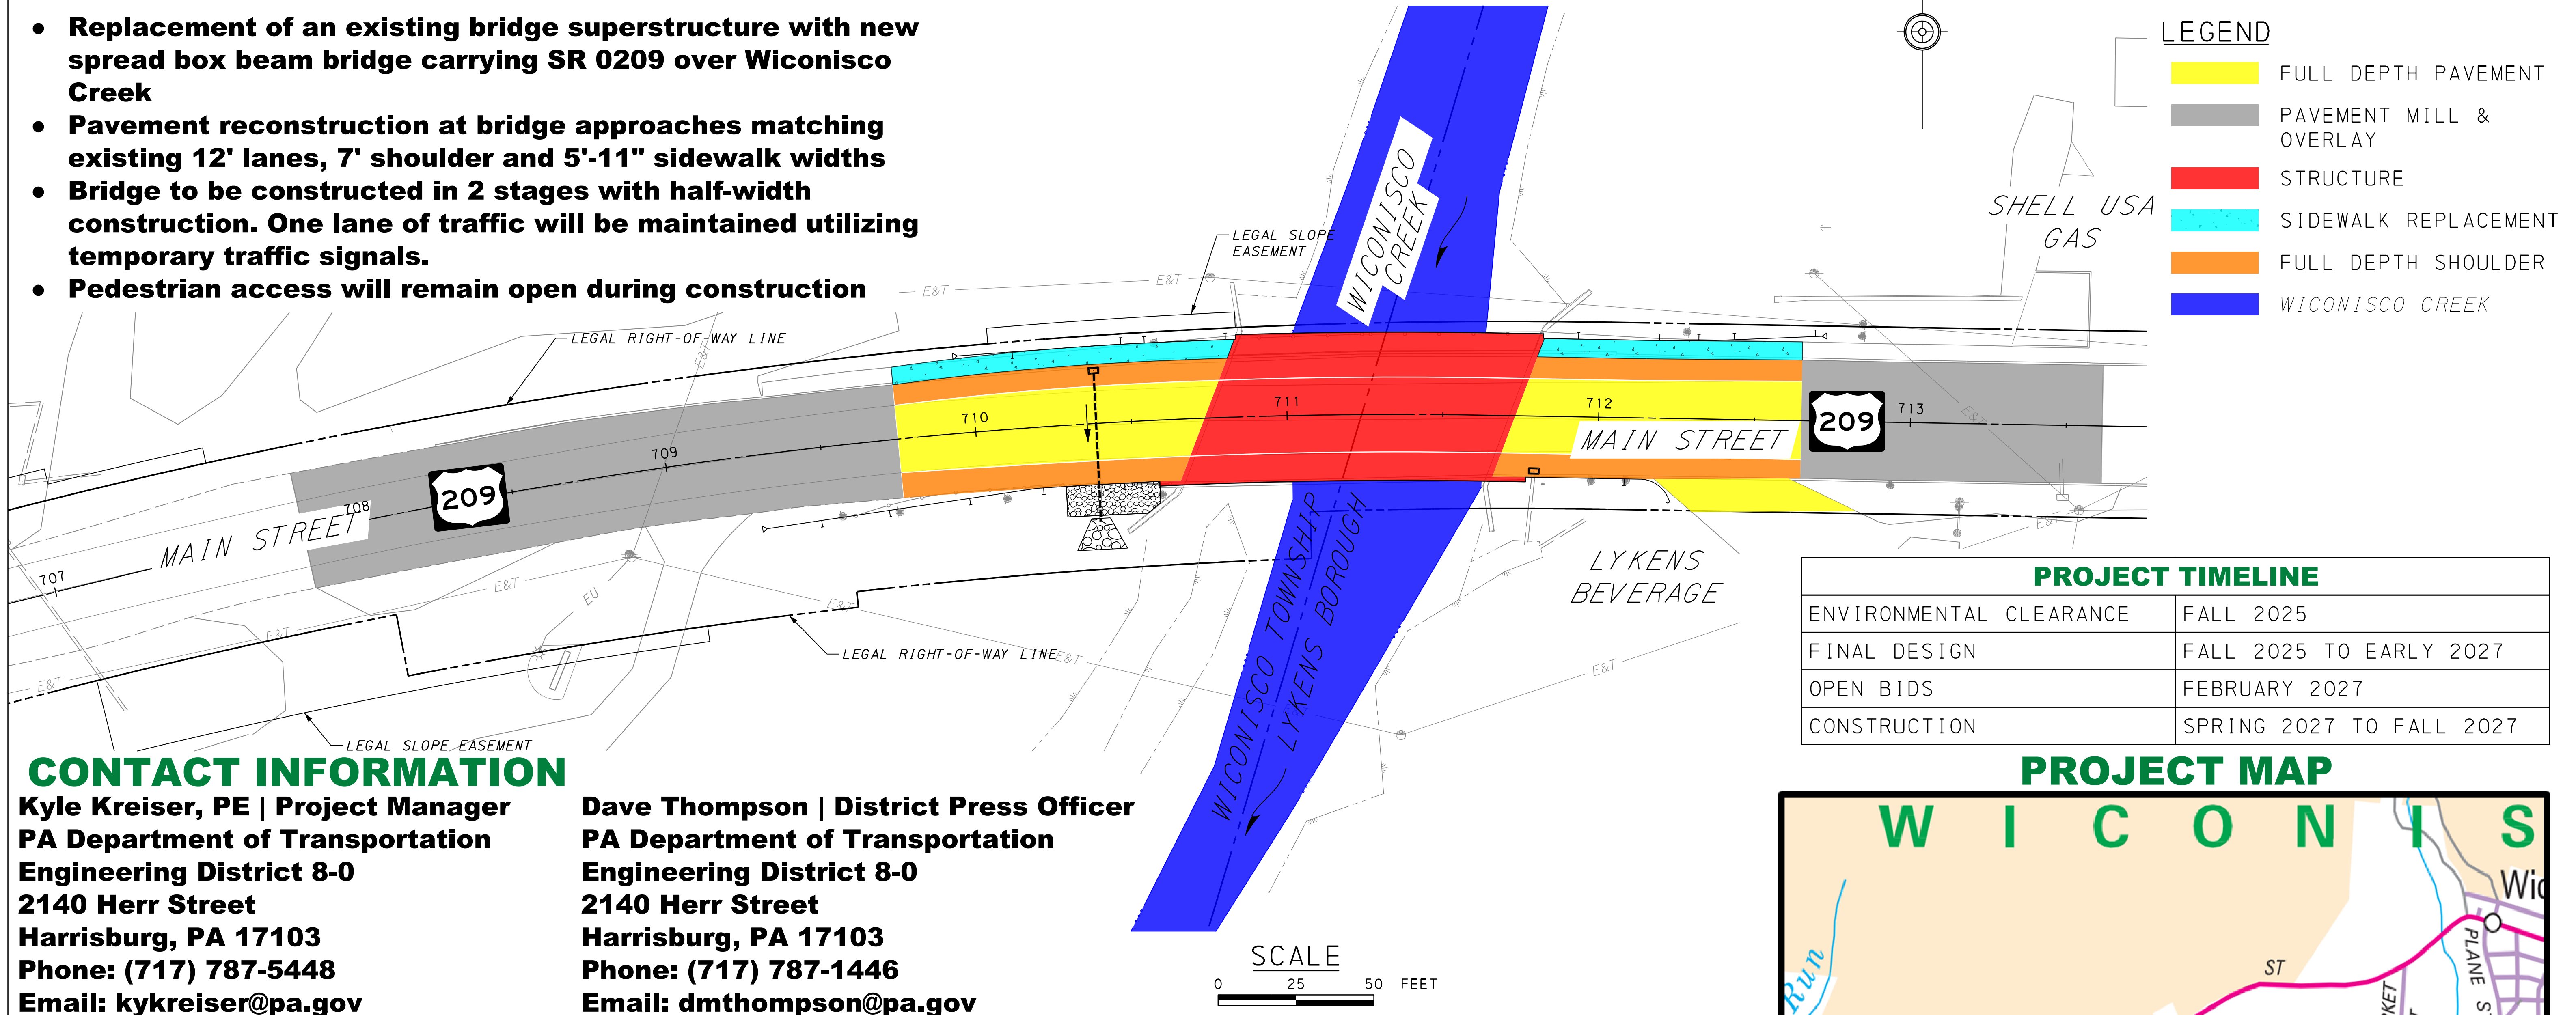

PROJECT MAP

