ECMS#/MPMS# 124400

SR 4022: SCI FAYETTE TO PA 43.





Preservation Project
SR 4022 Sec RDP
Luzerne Township, Fayette County

DISTRICT 12-0

Pennsylvania
Department of Transportation

PROJECT INTRODUCTION


The purpose of this presentation is to provide information covering the project improvements, traffic control and schedule.

The purpose of the project is to preserve the existing pavement, improve ride quality as well as enhance safety along the corridor.

The project is needed to extend the useable life of the facility.

Proposed improvements include:

- 3.98 miles of roadway

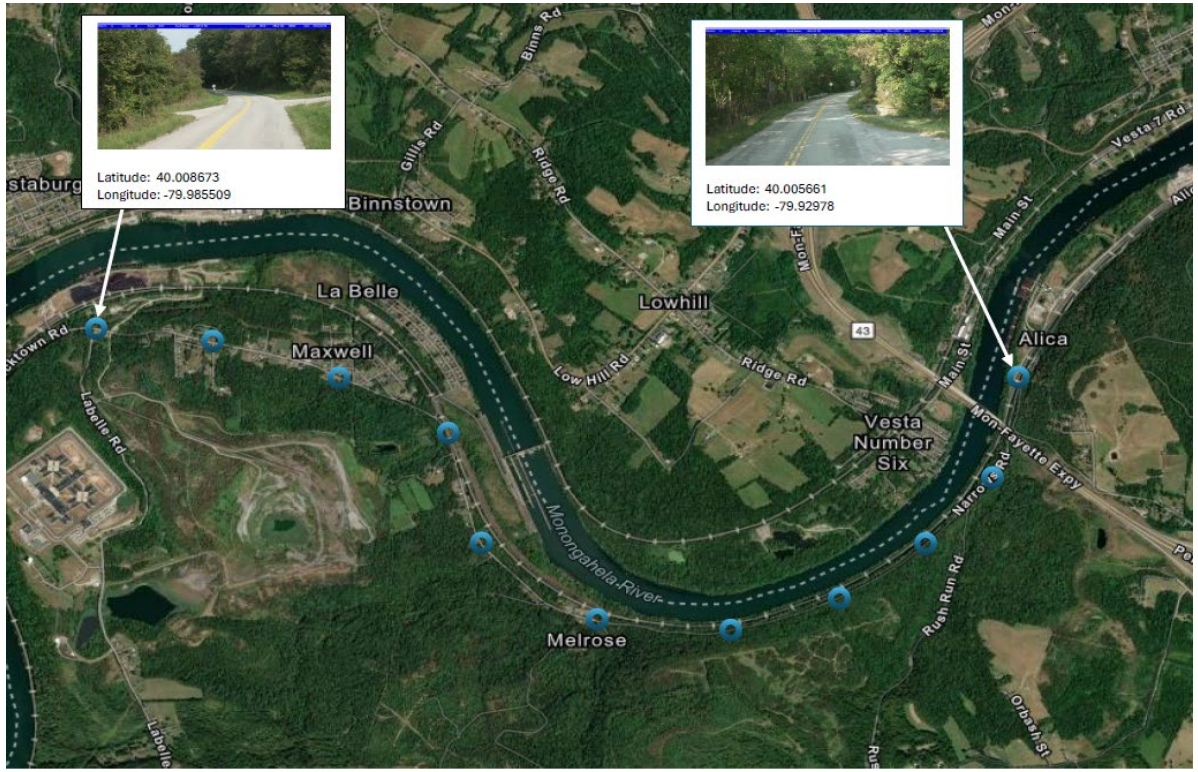

Project Limits: 0010/0000 to 0100/2549

ROADWAY IMPROVEMENTS

- 1-1/2” mill and resurface
- As-directed base and joint repairs
- Minor drainage improvements as necessary to restore proper function
- Update guide rail to current standard
- Replace signs, pavement markings and delineation
- Slide Repair, Type C shoulder repairs, and undercuts to stabilize roadway and shoulders.
- Seeding/topsoil in disturbed areas and tree trimming.



Example area where a Type C Shoulder Repair is needed.

TRAFFIC CONTROL DURING CONSTRUCTION

Majority of the work will be completed by implementing a single lane closure with flaggers.

Slide Repair, Type C Shoulder Repairs, and Undercuts will be completed in Segments 70, 80, and 90 by implementing a full closure and detour.



TENTATIVE PROJECT SCHEDULE

Milestone Dates

Let Date: March 25, 2027

Begin Construction: Spring 2027

Project Completion: December 2027



CONTACT INFORMATION

Project Manager

Derek Johnson, P.E.

derejohnso@pa.gov
724-439-7384

Press Officer

Melissa Maczko

mmaczko@pa.gov
724-439-7135

District 12 Projects Near You

FOLLOW PENNDOT

www.pa.gov/penndot

www.pa.gov/dmv

PennsylvaniaDepartmentofTransportation

PennDOTNews

PennsylvaniaDOT

PennDOTSec

/company/PennDOT

PennDOTSec

PennsylvaniaDOT

Pennsylvania
Department of Transportation